

washer between probes and strap. Hand tighten as far as you can. If needed, use pliers or wrench to go one turn further. Do not over tighten. The vibration probe should be installed by hand.

Always use rubber insulators to keep probes tight and provide insulation during damp conditions. The rubber insulators are necessary to maintain the waterproofing.

Position the collar high up on your pet's neck underneath the chin, with probes facing upward touching the pet's skin. Adjust collar to fit snug but not tight. You should be able to slide one finger between the pet's coat and the collar. The correct fit is very important because most training failures are caused by the probes not making direct contact with the skin. Remove collar, trim excess, and melt end using a small flame to prevent fraying. Remember, for growing dogs, check collar size weekly and adjust when necessary. Allow enough nylon for the collar to grow with your dog. **Never leave the collar on for more than 12 consecutive hours a day.**

F. CHANGING THE RECEIVER COLLAR CORRECTION LEVEL

The collar's stimulation level can be checked or changed at any time. To check the current stimulation level, begin with the unit turned on. Push and hold the power button. The light will come on, and then go off. Release the button. The unit will then blink the number of times to signify the setting level.

To change the stimulation level, turn the unit on. After about one minute, push and hold the power button until the light goes off. Then push the button the number of times for the desired level (1-5). Observe that the LED blinks each time you push the button. You are done. Continue to observe the LED. After five seconds it will blink once and then follow with rapid blinks indicating the level you have set it. For example, if you have set it to Level 3 by pushing the button three times then five seconds after you stopped pushing the LED will come on once, go out and then blink rapidly three times. This indicates the correction level has been changed to Level 3. At this point the LED will revert in seconds to blinking to indicate the battery mode.

G. USE AND TRAINING

Refer to your 5140/5132 Instruction Manual and Training Guide for further information.

F. TROUBLESHOOTING

Refer to your 5140/5132 Instruction Manual and Training Guide for further information, visit www.havahart.com or call 1(800) 800-1819, ext. 450 from 8 am – 7 pm EST.

LIMITED LIFETIME WARRANTY

Woodstream warrants that this product will be free from defects in material and workmanship under normal use for 1 year from the date of original consumer purchase.

Within 30 days of the original consumer purchase, this product is covered by Woodstream's 30-day money back guarantee. If you are not satisfied with the performance of this product, you may return it with the original receipt to the place of purchase for a full refund.

After 30 days and during the initial 12 month period Woodstream will, at our option, repair or replace the defective part(s) for a \$15 processing fee. Shipping costs to our facility are not covered by the Warranty. A copy of the original receipt showing the place and date of purchase must accompany the returned item. Please contact Woodstream for a Return Authorization Number (RGA), 800-800-1819, before returning the product to Woodstream. Products without an RGA number will be refused.

After one year from the date of the original consumer purchase, a prorated schedule is available to provide additional coverage. For information regarding this schedule please contact our Consumer Care Department at 800-800-1819.

Use the following address when returning product via UPS or U. S. mail:
WOODSTREAM CORPORATION
69 NORTH LOCUST ST., LITITZ, PA 17543

ATTN: CONSUMER CARE DEPARTMENT
RGA# _____

This Limited Lifetime Warranty is offered only to the original consumer purchaser. This Limited Lifetime Warranty is subject to the condition that any covered defect occurs under normal conditions of use and maintenance and that Woodstream receives prompt written notice of the discovery of the defect within the Limited Lifetime Warranty period. It does not apply to damage or failures that result from physical abuse or misuse of the product. The Limited Lifetime Warranty is void if any attempts are made to alter or repair the product prior to returning it to our facility within the Limited Lifetime Warranty period. This Limited Lifetime Warranty does not cover lost parts, broken probe studs or items displaying excessive wear. Wire that has been removed from the spool and /or placed in the ground and flags that are rusted or have been used are examples of items displaying excessive wear.

EXCEPT AS SPECIFICALLY SET FORTH HEREIN, THERE ARE NO WARRANTIES, REPRESENTATIONS, PROMISES OR ASSURANCES BY WOODSTREAM, EITHER EXPRESSED OR IMPLIED, WHETHER BY LAW, CUSTOM, PREVIOUS TRANSACTION OR OTHERWISE, INCLUDING WITHOUT LIMITATION, WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH REGARD TO THE PRODUCT. WOODSTREAM'S LIABILITY IS SOLELY AS STATED HEREIN AND NO OTHER LIABILITY SHALL EXIST, WHETHER BY NEGLIGENCE, STRICT LIABILITY, TORT OR ANY OTHER CAUSE OR ACTION. ALL LIABILITIES FOR WOODSTREAM STATED HEREIN ARE THE SOLE AND EXCLUSIVE REMEDIES OF THE ORIGINAL CONSUMER PURCHASER. IN NO EVENT SHALL WOODSTREAM BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES, OR ANY OTHER TYPE OF DAMAGE WHICH MAY BE CAUSED IN WHOLE OR IN PART BY ANY FAILURE, DEFECT OR PROBLEM OF THE PRODUCT.

This product is not a substitute for traditional obedience training. Woodstream does not guarantee the effectiveness of this product due to variances in canine personality, temperament and influences outside of Woodstream's control.

Some states do not allow the exclusion or limitation of consequential damages, so the above limitation or exclusion may not apply in all instances.

rev EC040205

**For more information go to: www.havahart.com
or call 1 (800) 800-1819 ext. 450 from 8 am – 7 pm EST.**



Havahart[®]

Caring Control for Pets and Wildlife

***5145 Extra Dog Collar Receiver
Instruction Manual***

OPERATING INSTRUCTIONS



INTRODUCTION

Congratulations on your purchase. The Havahart Extra Dog Collar Receiver will allow an additional dog in your Fence Free (5140) and Fence Free Deluxe (5132) Containment Systems. Havahart is committed to caring control of pets and wildlife, and all of our products are designed to enhance the relationship between animals and people. Through effective use of Havahart canine products, our goal is to help strengthen the bond between dogs and their owners.

SAFETY PRECAUTIONS

All Havahart products have been thoroughly tested for safety and effectiveness. To protect your dog and yourself, please observe the following **safety precautions**:

- Never leave the collar on your dog for more than 12 hours at one time.
- Only use the Havahart® Fence Free System on healthy dogs ages 8 months and older. Consult your veterinarian before using the collar if your dog has health problems.
- Check collar fit each time you place collar on your dog – **the collar must be fitted properly to work effectively** (see “Fitting the Collar”).
- Check dogs daily for skin irritation and do not use the collar if the skin is irritated.
- Always use the lowest stimulation possible to train your dog. On small dogs (less than 8-10 lbs.) use Level 1.

A. CONTENTS OF THE HAVAHART® EXTRA COLLAR

1. Waterproof Collar Receiver: Collar is red to distinguish it as a fence only collar.
2. Stimulation Probes (2) sets: (2) short probes for short-haired dogs and (2) long probes for dogs with longer or thicker coats. The long stimulation probes come installed on the receiver from the factory. The short probes are supplied separately in this carton.
3. Battery Charger – Plug into any standard household outlet when the receiver collar needs to be charged.


4. Test Light – Place test light over stimulation probes on the collar. With both Fence and Collar on, walk with test light to boundary. Unit lights and buzzes when operational.



B. FEATURES

1. High Quality Rechargeable NiMH Batteries
2. Collar contains 5 Stimulation Levels-Comes Ready to Use, Preset at Level 1
3. LED light indicates low battery and level of correction selected
4. UL Listed Components Included

NOTE: This Extra Dog Collar Receiver is powered by a NiMH (nickel metal hydride) battery. This high quality type of battery does not suffer any memory loss after repeated recharges. It will take a full charge every time you recharge it for two hours. You can expect a battery of this type and quality to last many years under normal use. In addition, under normal use conditions you can expect the battery to hold a charge for many days. It is recommended however that you keep the battery fully charged by keeping it on the charger whenever it is not in use. This assures peak operation.

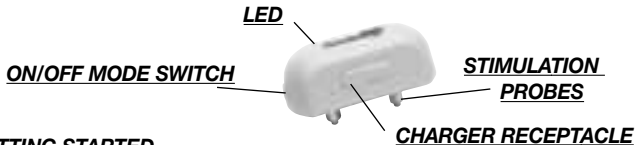

C. GETTING STARTED

Charging the Collar:

Fully charge the collar before the first use. Initial charge will take up to 10 hours. Subsequent charges should take two hours to completely charge the battery. Charge the unit anytime the LED rapidly blinks red. Rapid blinking occurs in a pattern of two quick blinks, a five second pause, followed by two quick blinks and so on. The collar can be charged using the supplied charger or placed on the wall mount transmitter.

- (1) To Turn Unit ON:** Use a small pointed item, like a pin or the end of a paper clip, to depress the operational button. Button is located at end of unit and is slightly inset. Depress button and hold for about five seconds. Solid red LED light appears, goes off, blinks one time, and then solid red LED lights again. Release button. Unit buzzes and is now On.
- (2) To Turn Unit OFF:** If you try to turn the unit off within 30 seconds of turning it on, the off instructions will not work as the collar is synchronizing with the fence during this time. Wait 30 seconds and then follow these instructions. Depress and hold button for about five seconds. Solid red LED light appears, goes off, blinks one time, and then solid red LED lights again. Release button. LED light turns off. Unit is now Off.

D. SETTING ID CODE FOR THE COLLAR (Read all 5 steps before starting)

In order to synchronize the collar with your fence system, it is necessary to set the identification code for the extra collar before initial use.

- 1.) Begin with a charged collar turned off. Stand within 1' of an active section (do not use the twisted wire section) of the boundary wire – turn the collar on. To turn on – press and hold the power button for about five seconds. The red light lights, blinks one time, and then lights again – at this point release the button. The collar is On.
- 2.) Within 10 seconds after turn on – push and hold button until the LED lights, blinks, and lights continuously – this takes about five seconds. Release the button.
- 3.) Push the button again, and hold until the light comes on and then goes off – release the button.
- 4.) Walk quickly away from the boundary wire until the red LED comes on again. Allow 60 seconds for LED to come on. The new ID code is set.
- 5.) The LED will stay lit for almost 60 seconds. After the LED blinks and goes off, you can proceed toward the boundary wire to verify that the ID code has been correctly set. Place the heart-shaped test light on the collar probes. As you approach the fence the collar will emit a tone and as you continue toward the wire the heart-shaped light will come on indicating that electronic stimulation is being delivered by the collar.

E. FITTING THE COLLAR

Very Important! The collar must be fitted properly to work effectively. Use the short probes for short-haired dogs and long probes for thick or long-haired breeds. It is recommended that the long probes be used on all breeds just to be sure that contact with the skin is assured. Always tighten stimulation probes with rubber